Plastic

Handle height

*Distance between

handle and stopper lever Empty weight

SA-SSG-FS

With Folding Handle and Hand Stopper

SA-SSG- SA-SSGF		
Load capacity	200 kg	
Platform size	460 x 750 r	mm
Usable size	460 x 680 mm	
Suitable caster	CW/UW	P/CP
Platform height	175 mm	175 mm

885 mm

40 mm

14.4 kg

885 mm

40 mm

13.0 kg

MA-SMG-HS MA-SMGP-HS M type

Load capacity 300 kg

Load Capacity	300 kg	
Platform size	630 x 950	mm
Usable size	630 x 865 mm	l
Suitable caster	CW/UW	P/CP
Platform height	215 mm	215 mm
Handle height	895 mm	895 mm
*Distance betweer handle and stopper I		40 mm
Empty weight	24.8 kg	21.0 kg



SA-SSG-HS

With Fixed Handle and Hand Stopper

SB-SSG-HS SB-SSGP-HS S type		
Load capacity	200 kg	
Platform size	460 x 750	mm
Usable size	460 x 680 mm	
Suitable caster	CW/UW	P/CP
Platform height	175 mm	175 mm
Handle height	870 mm	870 mm
*Distance between handle and stopper lev	ver 40 mm	40 mm
Empty weight	13.6 kg	12.2 kg

MB-SMG-HS MB-SMGP-HS M type

Load capacity 300 kg

Platform size 630 x 950 mm Usable size 630 x 865 mm Suitable caster CW/UW P/CP Platform height 215 mm 215 mm Handle height 895 mm 895 mm *Distance between handle and stopper lever handle and stopper lever Empty weight 23.8 kg 20.0 kg	Loud capacity	Joo kg	
Suitable caster CW/UW P/CP Platform height 215 mm Handle height 895 mm 895 mm *Distance between handle and stopper lever 40 mm 40 mm	Platform size	630 x 950	mm
Platform height 215 mm 215 mm Handle height 895 mm 895 mm *Distance between handle and stopper lever 40 mm 40 mm	Usable size	630 x 865 mm	
Handle height 895 mm 895 mm *Distance between handle and stopper lever 40 mm 40 mm	Suitable caster	CW/UW	P/CP
*Distance between handle and stopper lever 40 mm 40 mm	Platform height	215 mm	215 mm
handle and stopper lever 40 mm 40 mm	Handle height	895 mm	895 mm
Empty weight 23.8 kg 20.0 kg			40 mm
	Empty weight	23.8 kg	20.0 kg



MB-SMG-HS

With Folding Handle and Foot Stopper

SA-SSGP-FS S type			
Load capacity	200 kg		
Platform size	460 x 750 r	mm	
Usable size	460 x 680 mm		
Suitable caster	CW/UW	P/CP	
Platform height	175 mm	175 mm	
Handle height	885 mm	885 mm	
Empty weight	13.8 kg	12.4 kg	

MA-SMG-FS MA-SMGP-FS M type

Empty weight

Load capacity 300 kg Platform size 630 x 950 mm 630 x 865 mm Usable size Suitable caster 215 mm Platform height Handle height 895 mm 895 mm


24.0 kg



SA-SSG-FS

20.2 kg

Suitable Casters (with Radial ball bearing)

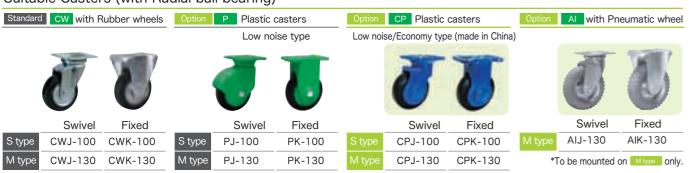

With Fixed Handle and Foot Stopper

,	SB	-SSG-	FS
,	SB	-SSGF	P-FS
			200

Load capacity 200 kg

Platform size	460 x 750 mm		
Usable size	460 x 700 mm		
Suitable caster	CW/UW	P/CP	
Platform height	175 mm	175 mm	
Handle height	870 mm	870mm	
Empty weight	13.0 kg	11.6 kg	
Suitable caster Platform height Handle height	460 x 700 mm CW/UW 175 mm 870 mm	P/CP 175 mm 870mm	

MB-SMG-FS MB-SMGP-FS

Load capacity 300 kg

Platform size	630 x 950 mm		
Usable size	630 x 885 mm		
Suitable caster	CW/UW	P/CP	
Platform height	215 mm	215 mm	
Handle height	875 mm	875 mm	
Empty weight	23.0 kg	19.2 kg	



Foot Sopper



the wheeles are unlocked.



When the inside lever is pushed, When the outside lever is pushed,






work adequately, you can adjust such device

SA-SSG-FS

Reference Number System

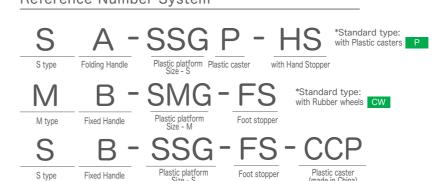

the wheeles are locked.

^{*}Stopper; not brake system but the wheel locking device to keep platform truck stationary in position.

^{*}Stopper; not brake system but the wheel locking device to keep platform truck stationary in position.

^{*}Stopper; not brake system but the wheel locking device to keep platform truck stationary in position.

^{*}Stopper; not brake system but the wheel locking device to keep platform truck stationary in position.